



25' X 50' FREESTANDING WITH 6.083' BAY SPACING

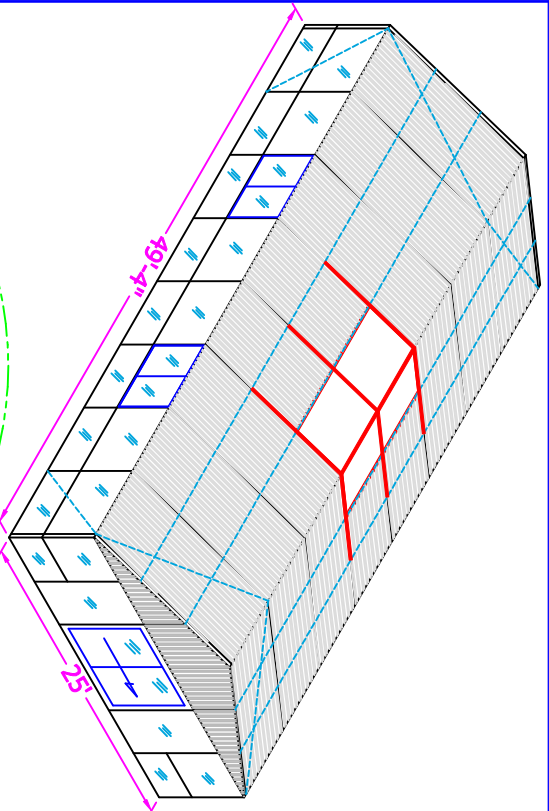


SECTION VIEW COLUMN & GRADE BEAM

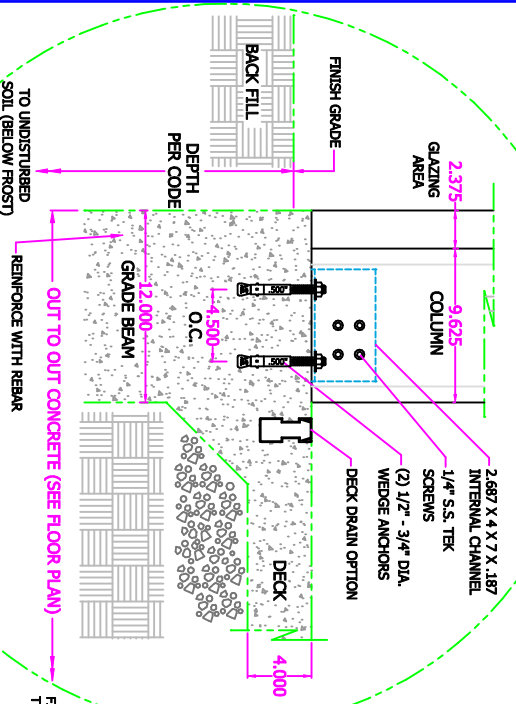


FOOTING BASED ON MIN. SOIL BEARING CAPACITY (CONCRETE MIX EQUALLING 3000 PSI) SOIL TEST BY OTHERS MAY BE REQD.


STD. FRAME COLOR: BRONZE DURACRON (BAKED ENAMEL)

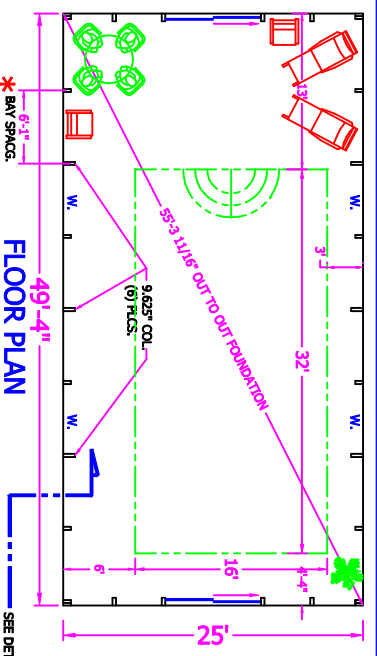

FLOOR PLAN

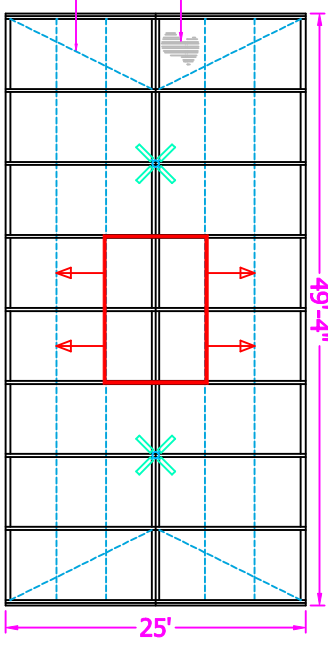


ROOF PLAN

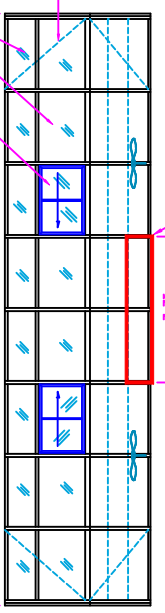


TYPICAL SIDEWALL ELEV.

(2) 8068 SLIDING GLASS DOORS WITH CLEAR INSULATED TEMPERED GLASS AND SCREEN DOOR


(4) 8040 SLIDING WINDOWS WITH CLEAR INSULATED TEMPERED GLASS AND SCREEN

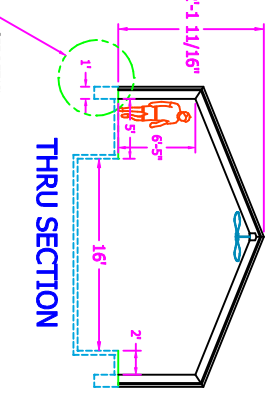

THRU SECTION

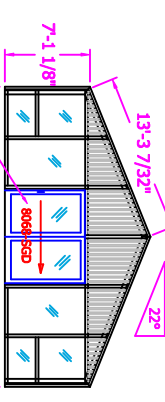

TYPICAL GABLE ELEV.

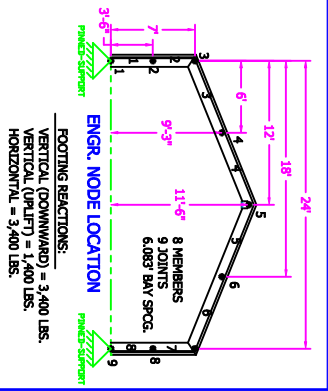

ENGR. NODE LOCATION
 FOOTING REACTIONS:
 VERTICAL (DOWNWARD) = 3,400 LBS.
 VERTICAL (UP/LIFT) = 1,400 LBS.
 HORIZONTAL = 3,400 LBS.

DESIGN LOADS: LIVE - 40 PSF DEAD - 5 PSF WIND - 90 MPH			©COPYRIGHT 2002 POOL ENCLOSURES, INC. THIS DRAWING IS THE PROPERTY OF MILLS STEEL, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN AUTHORIZATION OF MILLS STEEL, INC. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES NOT TO MAKE ANY CHANGES TO THE DRAWING, OR ANY PART THEREOF, WITHOUT THE WRITTEN AUTHORIZATION OF MILLS STEEL, INC.
DRAWN BY: KATLER SCALE: 3/32"=1' DATE:	DESCRIPTION: POOL ENCLOSURE JOB NAME: * 73" O.C. BAY EXAMPLE DRAWING NO: 25ECAD50		