PROJECT NAME: NEW

SIGN IF APPROVED: _____

DATE APPROVED: _____

NOTES:
1. THE ENCLOSURE REQUIRES A SQUARE & LEVEL SURFACE TO +/- 1/8"
2. ALL KNEEWALLS & OPENINGS IN KNEEWALL ARE TO BE SQUARE & PLUMB TO +/- 1/8"
3. THE LOCATION & SITE WORK MUST COMPLY WITH LOCAL BUILDING CODES AND ZONING ORDINANCES. THE SITE CONDITIONS SHOULD ALLOW THE INSTALLATION CREW TO ACCESS THE WORK AREA SAFELY AND EFFICIENTLY... SUCH AS BACK FILLING AROUND FOUNDATIONS, UNLOADING. ETC/
4. FOOTING DEPTHS AND SIZE ARE TO BE PER LOCAL BUILDING CODES/FROST LINE ETC.
5. MEASURE ALL FOUNDATIONS DIAGONALLY FOR SQUARNESS.
6. CONCRETE DECK MUST BE POURED BEFORE DELIVERY. (FOR ROLLING SCAFFOLDING).
7. THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE PER JOB WITHOUT NOTIFICATION.
8. ANY DELAYS INCURRED DUE TO FAULTY JOB SITE CONDITIONS; CONCRETE, EXISTING BLDGS. ABUTTING TO ENCLOSURE, ETC... EXPENSES WILL BE BACK-CHARGED TO THE CUSTOMER.
9. REVIEW FOOTING DETAILS THOROUGHLY, MIN. WIDTH, ADEQUATE REVEAL, ETC.
10. IMPORTANT... ALL CONCRETE WORK IS THE RESPONSIBILITY OF OWNER OR G. C.

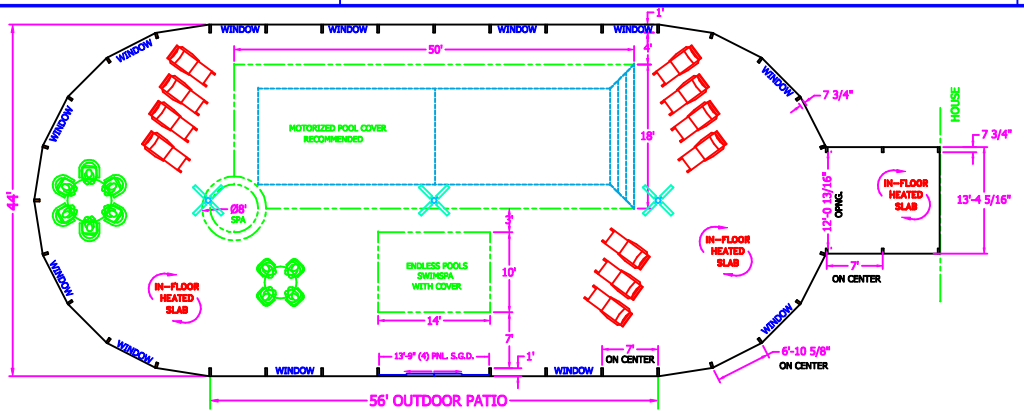

FLOOR PLAN (4145 SQ. FT.)



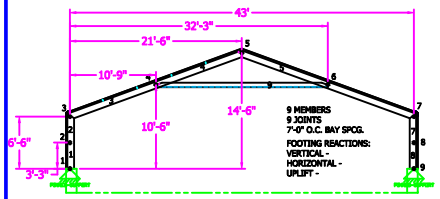

ENGR. NODE LOCATIONS

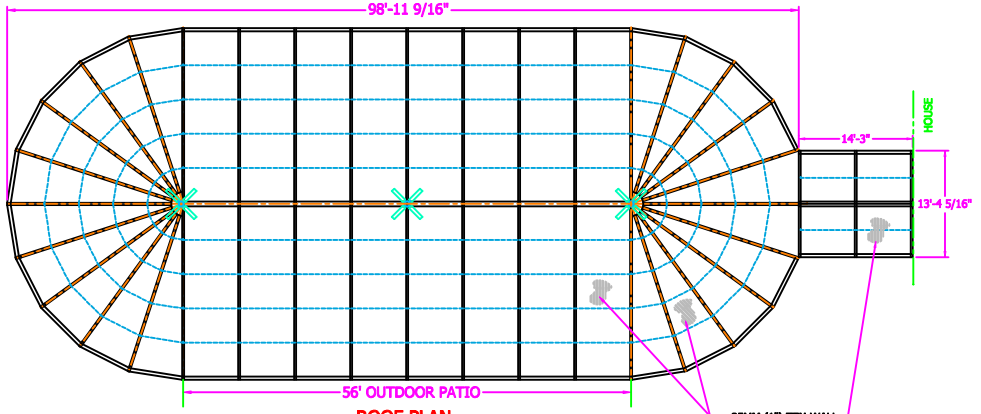

ROOF PLAN

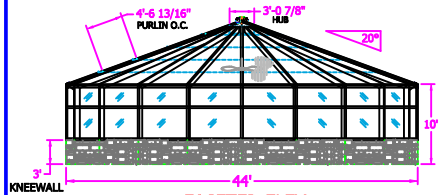

FACETED ELEV.

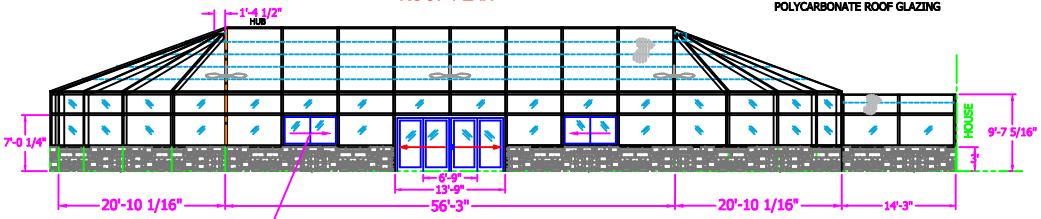

SIDEWALL ELEV.
OPPOSITE SIDE TYPICAL LESS DOOR

(12) 7040 SLIDING WINDOWS (SEE FLOOR PLAN)

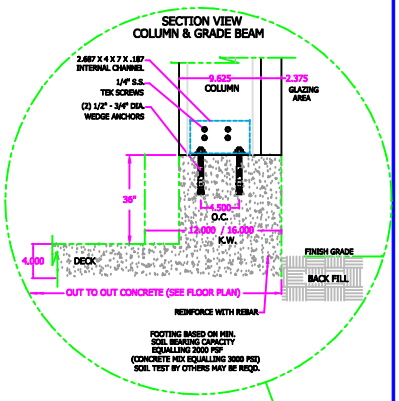

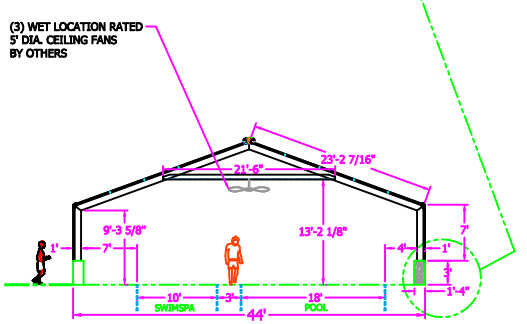

THRU SECTION

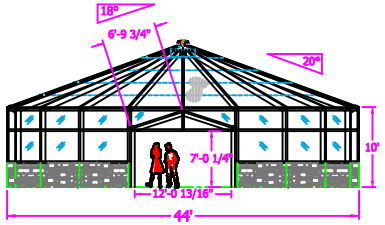

FACETED ELEV. @ WALKWAY

STD. FRAME COLOR: WHITE DURACRON (BAKED ENAMEL)

DESIGN LOADS:
LIVE - 64 PSF
DEAD - 5 PSF
WIND - 90 MPH
GROUND SNOW LOAD = 75 PSF

58 Blue Heron Dr.
Mills River, NC. 28759
ph.828-908-3991
fax 828-891-7796

©COPYRIGHT 2002 POOL ENCLOSURES, INC. THIS DRAWING IS THE PROPERTY OF POOL ENCLOSURES, INC.(D.B.A.PEI) AND EMBODIES CONFIDENTIAL INFORMATION, TRADE SECRET INFORMATION, AND/OR KNOW-HOW WHICH IS THE PROPERTY OF PEI. BY ACCEPTING THIS DRAWING THE RECIPIENT AGREES NOT TO PROVIDE, OR OTHERWISE MAKE AVAILABLE, THE DRAWING, OR ANY INFORMATION OR KNOW-HOW EMBODIED THERIN TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN AUTHORIZATION.

DRAWN BY:	BILL KATER
SCALE	1/16"=FT.
DATE	
SHEET	1 OF
DESCRIPTION	POOL ENCLOSURE
JOB NAME	DOUBLE FACETED END EXAMPLE
DRAWING NO.	44X100FAC